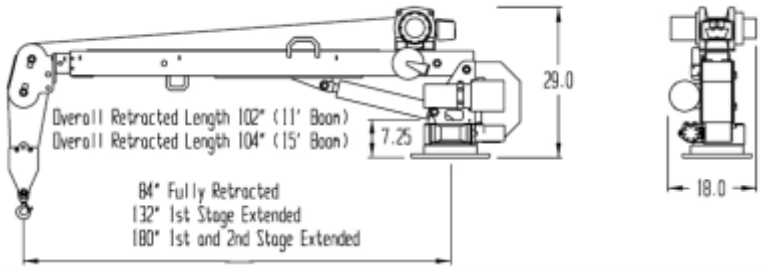
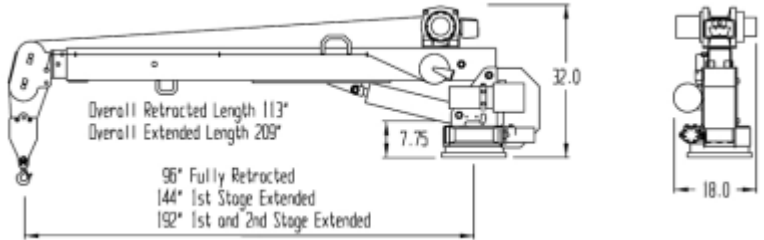
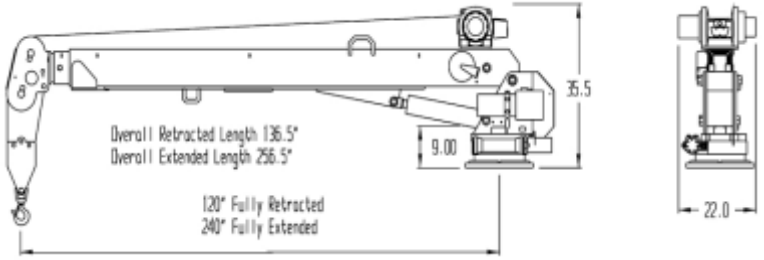
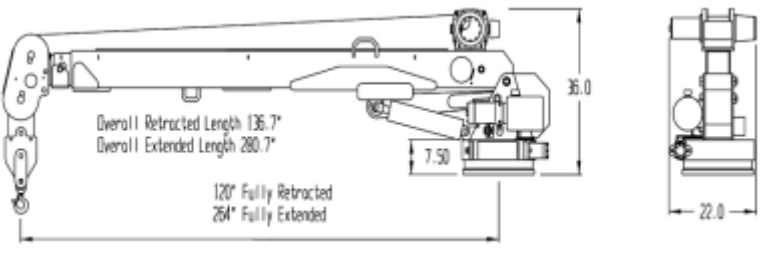


specifications

Mechanics Trucks, Lube Trucks, Telescoping Cranes

ELECTRIC/HYDRAULIC CRANES EH SERIES

FOR SERVICE TRUCKS

3200 EH - 10,000 ft/lb maximum capacity	requirements	ratings
 <p>Overall Retracted Length 102" (11' Boon) Overall Retracted Length 104" (15' Boon) 84" Fully Retracted 132" 1st Stage Extended 180" 1st and 2nd Stage Extended</p>	<ul style="list-style-type: none"> • 1000 CCA battery • Auxiliary battery (DC) (recommended) • 100 amp alternator • 14"x16" base plate • 14.75"x11.5" bolt pattern • Outriggers • Base Weight—617 lb 	<ul style="list-style-type: none"> • 3200 lb @ 3 ft • 2625 lb @ 4 ft • 2100 lb @ 5 ft • 1750 lb @ 6 ft • 1500 lb @ 7 ft • 1312 lb @ 8 ft • 1050 lb @ 10 ft • 954 lb @ 11 ft • 807 lb @ 13 ft • 700 lb @ 15 ft
 <p>Overall Retracted Length 113" Overall Extended Length 209" 96" Fully Retracted 144" 1st Stage Extended 192" 1st and 2nd Stage Extended</p>	<ul style="list-style-type: none"> • 1000 CCA battery • Auxiliary battery (DC) (recommended) • 150 amp alternator • 14"x14" base plate • 12"x12" bolt pattern • Outriggers • Base Weight—829 lb 	<ul style="list-style-type: none"> • 4000 lb @ 4 ft • 3200 lb @ 5 ft • 2666 lb @ 6 ft • 2286 lb @ 7 ft • 2000 lb @ 8 ft • 1777 lb @ 9 ft • 1600 lb @ 10 ft • 1333 lb @ 12 ft • 1143 lb @ 14 ft • 1000 lb @ 16 ft
 <p>Overall Retracted Length 136.5" Overall Extended Length 256.5" 120" Fully Retracted 240" Fully Extended</p>	<ul style="list-style-type: none"> • 1000 CCA battery • Auxiliary battery (DC) • 150 amp alternator • 16.75"x16.75" base plate • 14.75"x14.75" bolt pattern • Outriggers • Base Weight—1,400 lb 	<ul style="list-style-type: none"> • 5000 lb @ 5 ft • 4166 lb @ 6 ft • 3571 lb @ 7 ft • 3125 lb @ 8 ft • 2500 lb @ 10 ft • 2083 lb @ 12 ft • 1785 lb @ 14 ft • 1562 lb @ 16 ft • 1388 lb @ 18 ft • 1250 lb @ 20 ft
 <p>Overall Retracted Length 136.7" Overall Extended Length 280.7" 120" Fully Retracted 264" Fully Extended</p>	<ul style="list-style-type: none"> • 1000 CCA battery • Auxiliary battery (DC) • 150 amp alternator • 18"x18" base plate • 14.75"x14.75" bolt pattern • Outriggers • Base Weight—1,550 lb 	<ul style="list-style-type: none"> • 6000 lb @ 6 ft • 5143 lb @ 7 ft • 4500 lb @ 8 ft • 3600 lb @ 10 ft • 3000 lb @ 12 ft • 2571 lb @ 14 ft • 2250 lb @ 16 ft • 2000 lb @ 18 ft • 1800 lb @ 20 ft • 1636 lb @ 22 ft



Maintainer

Crafting a Legacy of Premium Truck Bodies





STANDARD ON ALL EH SERIES CRANES

- **PLANETARY WINCH:**
Hoist drum and wire rope located outside of boom for improved operator visibility
- **ANTI TWO-BLOCK:** Standard on all models
- **SYSTEM OVERRIDES:** Anti two-block, pump functions, crane functions
- **HYDRAULIC SYSTEM:** Self-contained, 12 volt DC motor delivers 2.2 gal/min.
- **360° ROTATION:** All steel worm gear drive system provides 360° continuous
- **POWDER COAT FINISH:** For high gloss and durability
- **OSHA 1910.180/ANSI B30.5** compliant
- **LOAD CUSHIONING:** Counterbalance check valves
- **WIRELESS REMOTE CONTROL:**
Allows operator to be more mobile and maintain a safe distance from loads



Wireless Remote

MODEL	TYPE	Crane Rating (ft*lb)	REACH	Max Lift (lbs)	BOOM ELEVATION
3200 EH	Elec/Hyd	10,000	15'	3,200	-0° +75°
4000 EH	Elec/Hyd	16,000	16'	4,000	-0° +75°
5000 EH	Elec/Hyd	25,000	20'	5,000	-0° +75°
6000 EH	Elec/Hyd	36,000	22'	6,000	-0° +75°



MANUAL EXTENSION:

Offers 4' to 6' of extra boom reach
(Available on 3200 EH & 4000 EH models)



20' CRANE PEDESTAL:

Used for flat bed applications
(Available on all EH model cranes)



BATTERY ISOLATOR:

Dedicates crane function draw from the auxiliary battery only, protecting your truck battery
(Available on all EH model cranes)



POWER EXTEND:

Eliminates manual boom reach adjustments
(Available on all EH model cranes. Standard on 5000 EH & 6000 EH)

READY TO GO TO WORK!

All EH Series Cranes are shipped assembled and factory tested

EH Series Provides the highest maximum duty cycle possible in the electric crane industry!

EH Series Cranes perform to a higher standard of durability & reliability